




STAGGERED TOOTH

DSSC Series Shank Type



- Excellent for flat-bottom slotting, shouldering, and back facing operations
- Positive geometry and staggered tooth design improves shearing action and decreases vibration
- Wiper flats create fine surface finishes
- One-piece body construction
- Special sizes can be quoted
- Cutter bodies and inserts made in the USA

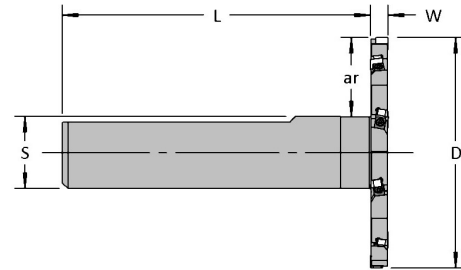

Diameter D	Part Number	Dimensions (inches)				No. of Inserts		Insert	Standard Components	
		W	S	L	ar	Total	Eff.		Wedge	Screw
1.00	DSSC-010	0.250	0.75	4.25	0.25	2	1	1215	6W006	6DS343
	DSSC-020	0.313	0.75	4.25	0.25	2	1	1215	6W006	6DS343
	DSSC-030	0.375	0.75	4.25	0.25	2	1	1215	6W006	6DS343
2.00	DSSC-040	0.250	1.00	5.25	0.50	6	3	1215	6W006	6DS343
	DSSC-050	0.313	1.00	5.25	0.50	6	3	1215	6W006	6DS343
	DSSC-060	0.375	1.00	5.25	0.50	6	3	1312	6W006	6DS343
	DSSC-070	0.375	1.25	6.25	0.37	6	3	1312	6W006	6DS343
	DSSC-080	0.500	1.00	5.25	0.50	6	3	1312	6W006	6DS343
	DSSC-090	0.500	1.25	6.25	0.37	6	3	1312	6W006	6DS343
3.00	DSSC-100	0.250	1.25	5.75	0.87	8	4	1215	6W006	6DS343
	DSSC-110	0.313	1.25	5.75	0.87	8	4	1215	6W006	6DS343
	DSSC-120	0.375	1.25	5.75	0.87	8	4	1312	6W006	6DS343
	DSSC-130	0.500	1.25	5.75	0.87	8	4	1312	6W006	6DS343
	DSSC-140	0.750	1.25	5.75	0.87	8	4	1500	6W200	6DS343
4.00	DSSC-150	0.250	1.25	5.25	1.37	10	5	1215	6W006	6DS343
	DSSC-160	0.313	1.25	5.25	1.37	10	5	1215	6W006	6DS343
	DSSC-170	0.375	1.25	5.25	1.37	10	5	1312	6W006	6DS343
	DSSC-180	0.500	1.25	5.25	1.37	10	5	1312	6W006	6DS343
	DSSC-190	0.750	1.25	5.25	1.37	10	5	1500	6W200	6DS343

Size	Part Number					Page
	0.007R	0.015R	0.030R	0.060R	0.125R	
1215	1215-007	1215-015	1215-030	1215-060	X	22
1312	X	1312-015	1312-030	1312-060	1312-125	
1500	X	1500-015	1500-030	1500-060	1500-125	

SLOTING CUTTERS